


Resonance free high frequency vibratory hammers

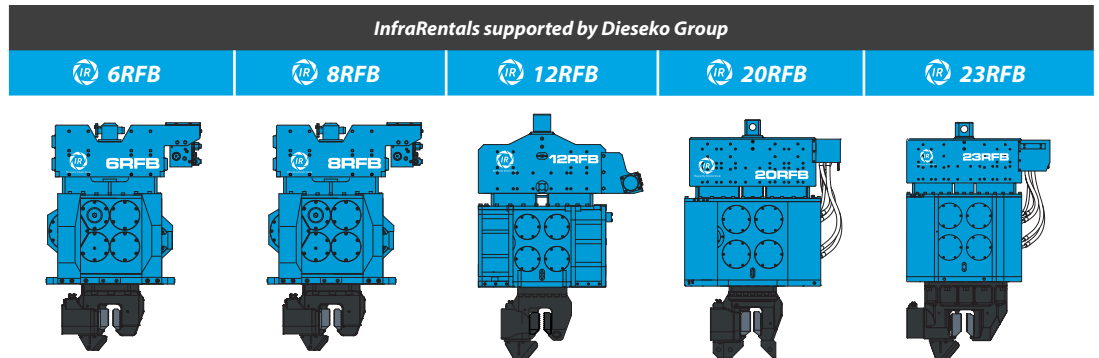

	6RFB	8RFB	12RFB	20RFB	23RFB
<i>Eccentric moment (kgm)</i>	0 - 6.5	0 - 7.5	0 - 12.0	0 - 19.0	0 - 23
<i>Max. centrifugal force (kN)</i>	0 - 377	0 - 435	0 - 700	0 - 1100	0 - 1350
<i>Max. frequency (rpm)</i>	2300	2300	2300	2300	2300
<i>Max. amplitude (mm)</i>	0 - 13.5	0 - 15.2	0 - 16.6	0 - 14.2	0 - 19.0
<i>Max. static line pull (kN)</i>	120	120	200	300	300
<i>Working pressure (bar)</i>	350	350	350	350	350
<i>Max. oil flow (l/min)</i>	138	185	261	499	561
<i>Dynamic weight (kg) (without clamp)</i>	960	985	1450	2675	2350
<i>Total weight (kg) (without clamp)</i>	1490	1515	2225	3810	4670
<i>L x W x H (mm)</i>	1158 x 595 x 1214	1158 x 595 x 1214	1519 x 674 x 1597	1560 x 722 x 1530	1560 x 790 x 1810
<i>Sheet pile clamp*</i>	60TU	60TU	100TU	130TU	160TU
<i>Tube clamp set*</i>	-	-	55TC	80TC	80TC
<i>Pile clamp*</i>	60TP	60TP	120TP	120TP	120TP

*Manufacturer's recommendation.

Stock locations: • Dronten (NL) • Sliedrecht (NL) • Hohenwart (DE) • Hamburg (DE) • Großwallstadt (DE)