


# Excavator-mounted vibrator

High frequency vibratory hammers with swivel head

InfraRentals supported by Dieseko Group

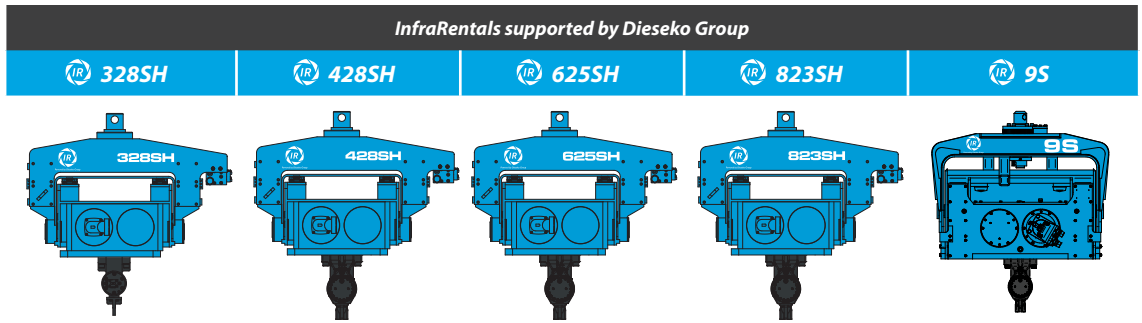

	328SH	428SH	625SH	823SH	9S
Eccentric moment (kgm)	3.2	4.0	6.0	8.0	8.9
Max. centrifugal force (kN)	275	345	411	465	522
Max. frequency (rpm)	2800	2800	2500	2300	2300
Max. amplitude (mm)	11.1	12.3	18.2	23.2	20.4
Max. static line pull (kN)	120	120	120	120	190
Working pressure (bar)	350	350	350	350	350
Max. oil flow (l/min)	110	170	201	185	253
Dynamic weight (kg) (without clamp)	575	650	660	690	890
Total weight (kg) (without clamp)	1445	1460	1290	1490	1920
L x W x H (mm)	1640 x 572 x 1210	1640 x 582 x 1196	1640 x 582 x 1196	1640 x 582 x 1196	1670 x 710 x 1997
Sheet pile clamp*	40TU	60TU	60TU	60TU	60TU
Tube clamp set*	-	-	-	-	-
Pile clamp*	60TP	60TP	60TP	60TP	-

\*Manufacturer's recommendation.



### Stock locations:

- Dronten (NL)
- Sliedrecht (NL)
- Hohenwart (DE)
- Hamburg (DE)
- Großwallstadt (DE)