


# Excavator-mounted vibrator


**Resonance free high frequency vibratory hammers with swivel head**



	6RFSH	8RFSH
Eccentric moment (kgm)	0 - 6.5	0 - 7.5
Max. centrifugal force (kN)	0 - 377	0 - 435
Max. frequency (rpm)	2300	2300
Max. amplitude (mm)	0 - 13.3	0 - 14.9
Max. static line pull (kN)	120	120
Working pressure (bar)	350	350
Max. oil flow (l/min)	138	185
Dynamic weight (kg) (without clamp)	975	1005
Total weight (kg) (without clamp)	1900	1930
L x W x H (mm)	1750 x 848 x 1177	1750 x 848 x 1177
Sheet pile clamp*	60TU	60TU
Tube clamp set*	-	-
Pile clamp*	60TP	60TP

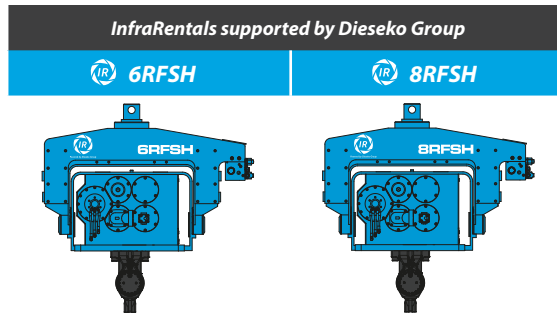

**Side gripper excavator mounted vibratory hammers**



	8SG
Eccentric moment (kgm)	8
Max. centrifugal force (kN)	464
Max. frequency (rpm)	2300
Max. amplitude (mm)	7
Max. static line pull (kN)	120
Working pressure (bar)	350
Max. oil flow (l/min)	214
Dynamic weight (kg) (without clamp)	2300
Total weight (kg) (without clamp)	3300
L x W x H (mm)	1663 x 1416 x 2384
Sheet pile clamp*	60TU

\*Manufacturer's recommendation.