


Ring vibratory hammers with variable moment

InfraRentals supported by Dieseko Group

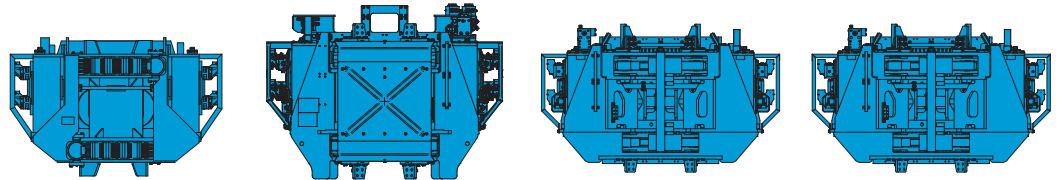

	20VMR	24VMR	32VMR	38VMR
Eccentric moment (kgm)	0 - 20	0 - 24	0 - 32	0 - 38
Max. centrifugal force (kN)	0 - 1160	0 - 1400	0 - 1800	0 - 2200
Max. frequency (rpm)	2300	2300	2300	2300
Max. amplitude (mm)	0 - 6	0 - 6	0 - 5	0 - 6
Max. static line pull (kN)	300	300	400	400
Working pressure (bar)	350	350	350	350
Max. oil flow (l/min)	550	552	860	960
Min. tube diameter (mm)	406	406	406	406
Max. tube diameter (mm)	508	610	610	610
Dynamic weight (kg) (without clamp)	6500	8080	12000	12400
Total weight (kg) (without clamp)	6900	8650	12500	12900
L x W x H (mm)	2368 x 1320 x 1515	2518 x 1425 x 1805	2602 x 1581 x 1740	2802 x 1720 x 1740
Max. pre-tension (kN)	250	250	400	400

Stock locations:

- Dronten (NL)
- Sliedrecht (NL)
- Hohenwart (DE)
- Hamburg (DE)
- Großwallstadt (DE)

