


**Hochfrequenz-
Baggeranbauvibratoren
mit variablem
statischem Moment**

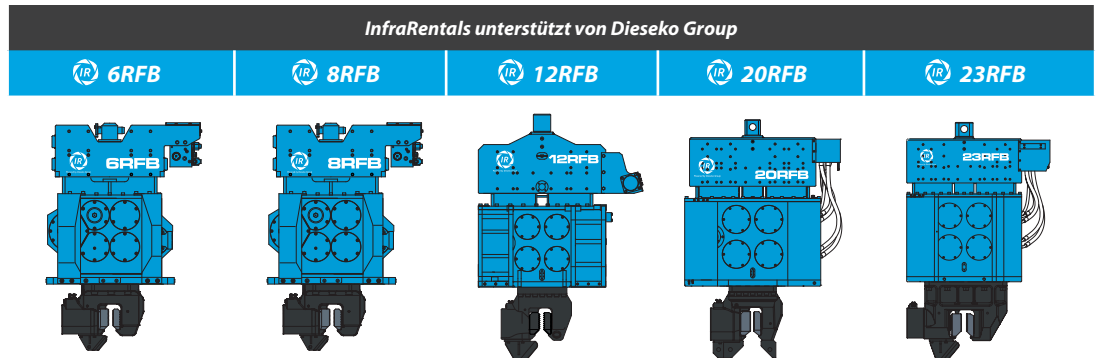

	6RFB	8RFB	12RFB	20RFB	23RFB
Statische Moment (kgm)	0 - 6.5	0 - 7.5	0 - 12.0	0 - 19.0	0 - 23
Max. Fliehkraft (kN)	0 - 377	0 - 435	0 - 700	0 - 1100	0 - 1350
Max. Drehzahl (UPM)	2300	2300	2300	2300	2300
Max. Amplitude (mm)	0 - 13.5	0 - 15.2	0 - 16.6	0 - 14.2	0 - 19.0
Max. Statische Zugkraft (kN)	120	120	200	300	300
Max. Betriebsdruck (bar)	350	350	350	350	350
Max. Fördermenge (l/min)	138	185	261	499	561
Dynamisches Gewicht (kg) (ohne Klemmzange)	960	985	1450	2675	2350
Gesamtgewicht (kg) (mit Klemmzange)	1490	1515	2225	3810	4670
L x B x H (mm)	1158 x 595 x 1214	1158 x 595 x 1214	1519 x 674 x 1597	1560 x 722 x 1530	1560 x 790 x 1810
Spundwandklemmzange*	60TU	60TU	100TU	130TU	160TU
Rohrklemmzange*	-	-	55TC	80TC	80TC
Pfahlklemmzange*	60TP	60TP	120TP	120TP	120TP

*Empfehlung des Herstellers.